

Step 2 Create a controller

Start by creating a controller that the player will use to collect dots.

Open the 'Catch the dots' Scratch starter project.




Online: open the starter project at rpf.io/dots-on (<http://rpf.io/dots-on>).

If you have a Scratch account you can make a copy by clicking **Remix**.

Offline: download the starter project from rpf.io/p/en/catch-the-dots-go (<http://rpf.io/p/en/catch-the-dots-go>), and then open it in the Scratch offline editor.

If you need to download and install the Scratch offline editor, you can find it at rpf.io/scratchoff (<http://rpf.io/scratchoff>).

You should see a controller sprite:



Add some code to the controller sprite to make the sprite turn right if the player presses the right arrow key:



```
when green flag clicked
  forever loop
    if key right arrow pressed? then
      turn 3 degrees
```

Test your code. The controller should spin to the right when you press the right arrow key.



Add code to the controller sprite to make the sprite turn left if the player presses the left arrow key.



I need a hint

Here is what your code should look like:

```
when green flag clicked
  forever loop
    if key right arrow pressed? then
      turn 3 degrees
    if key left arrow pressed? then
      turn 3 degrees
```


Step 3 Gain points or lose lives

Now you're going to add some dots that the player needs to collect.

Create a new sprite called 'red'. This sprite should be a small red dot.



Add this script to your 'red' sprite to create a new clone of the sprite every few seconds:

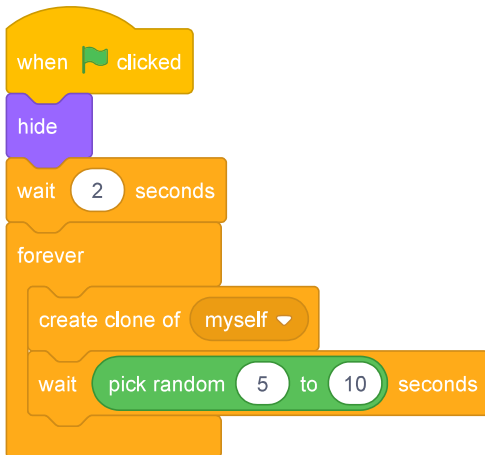


If you click the green flag now, it looks like nothing is happening. This is because all of the cloned sprites are hidden, and they appear in the same place.

You are going to add code to make each new clone appear in one of the four corners of the Stage.

X [-180, 180]


[180, 180] X



X [-180, -180]


[180, -180] X

Create a new list called **start positions**, click the list's (+) icon to add the values **-180** and **180**.

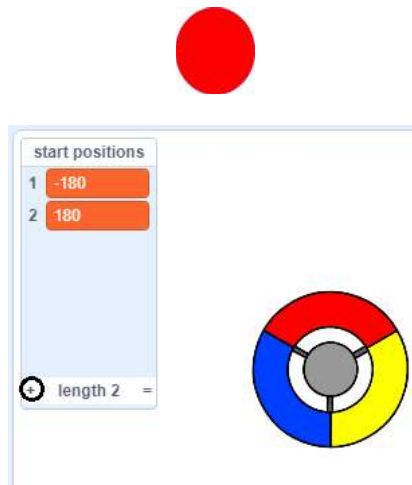


Make a list

- Click on **Make a List** under **Variables**.

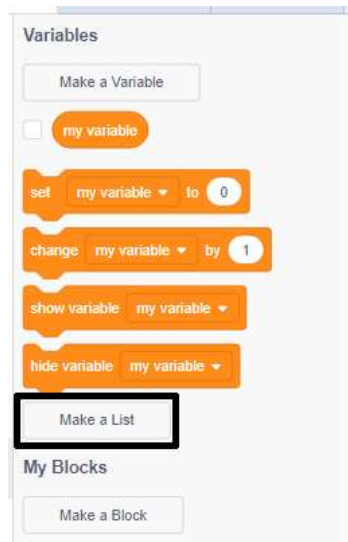


- Type in the name of your list. You can choose whether you would like your list to be available to all sprites, or to only a specific sprite. Click **OK**.

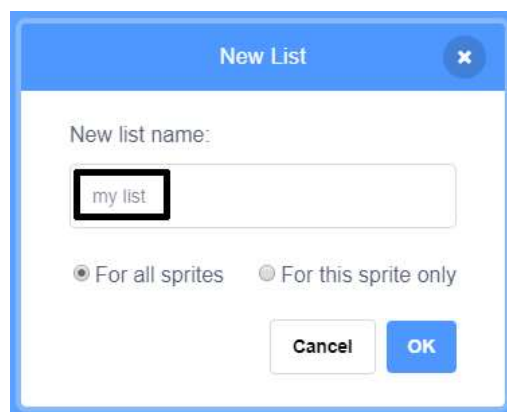

- Once you have created the list, it will be displayed on the stage, or you can untick the list in the Scripts tab to hide it.




- Click the **+** at the bottom of the list to add items, and click the cross next to an item to delete it.



- New blocks will appear and allow you to use your new list in your project.



Then you can hide the list by unselecting this box:

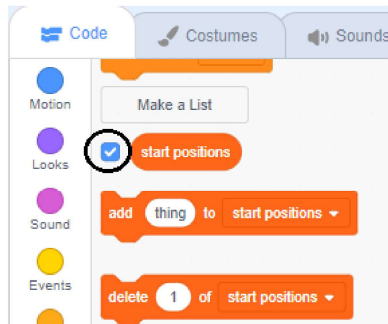

Notice that the coordinate for each corner of the Stage is a combination of 180 and -180. This means you can use the list to pick a corner of the Stage at random.


Add this code to the 'dot' sprite to make each new sprite clone appear in a random corner and then slowly move towards the controller sprite.



```
when I start as a clone
  go to x: item pick random 1 to 2 of start positions y: item pick random 1 to 2 of start positions
  point towards controller
  show
  repeat until touching controller ?
    move 1 steps
```

This new code chooses either -180 or 180 for the x and y positions, meaning that each 'dot' sprite clone starts in a corner of the Stage.

Test your project. You should see red dots appear in the corners of the Stage and move slowly towards the controller.



Create two new variables called `lives` and `score`.



Add code to your Stage to set the **lives** variable to 3 and the **score** to 0 at the start of the game.



```
when green flag clicked
  set lives to 3
  set score to 0
```

Add this code to the end of the Stage's script to make the game end when the player loses the last of the lives:



```
wait until lives < 1
  stop all
```

The player should win points for catching dots, and should lose lives for failing to catch dots. A dot can only be caught by matching the colour of the controller to the colour of the dot.



Go back to the 'red' dot sprite's Scripts area to add some code blocks to the end of the sprite's **when I start as a clone** script.

First, make the dot clone **move 5 steps** so that it overlaps the controller.


Then add code to either add **1** to **score** if the colour of the dot clone matches the colour of the controller when they touch, or to take **1** away from **lives** if their colours don't match.

i Adding a sound from the library


- Select the sprite you want to add the sound to.




- Click the **Sounds** tab, and click **Choose a Sound**:

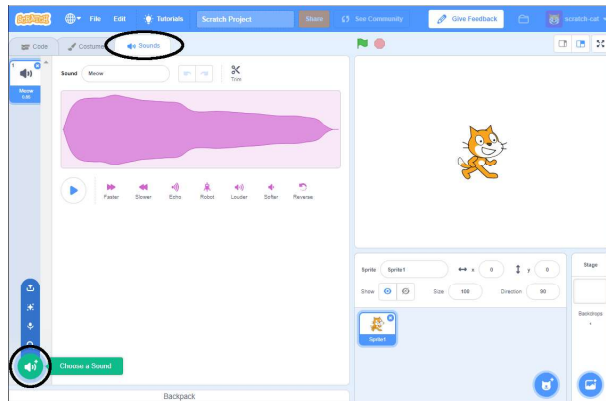

- Sounds are organised by category, and you can hover over the icon to hear a sound. Choose a suitable sound.

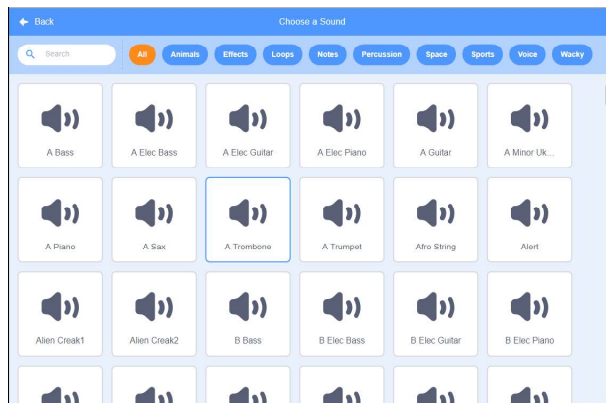

- You should then see that your sprite has your chosen sound.

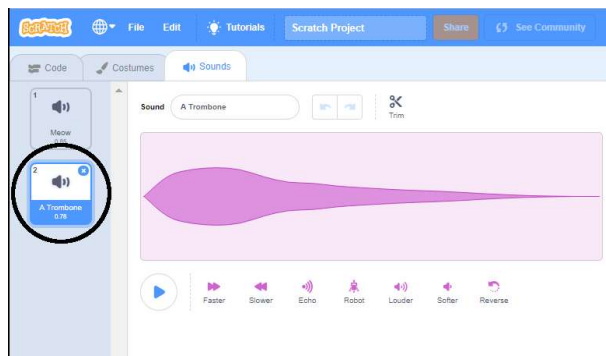

```
move 5 steps
if touching color red ? then
  change score by 1
  play sound pop until done
else
  change lives by -1
  play sound Laser1 until done
delete this clone
```


Test your game to make sure that:



1. You lose a life if you don't match a dot with the correct colour
2. You score a point if you match a dot correctly

Step 4 More dots


Duplicate your 'red' dot sprite twice, and name the two new sprites 'yellow' and 'blue':



Change the costume of each new sprite so it is the correct colour: the 'yellow' sprite should be yellow, and the 'blue' sprite should be blue.




Change the code of each sprite so that the player has to match dot clone to the correct colour on the controller to score points.

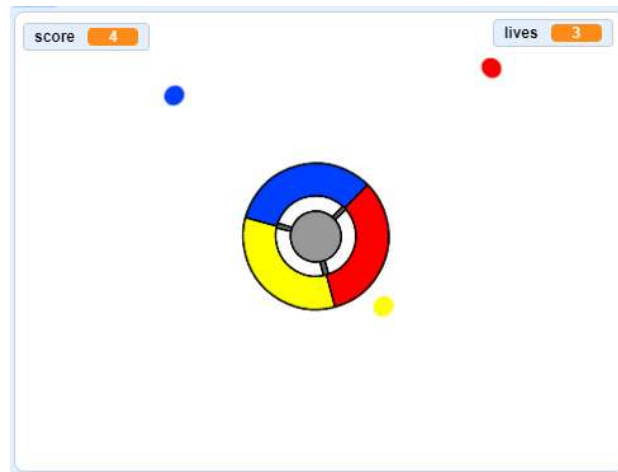

I need a hint

This is how you need to change the code for the yellow sprite:

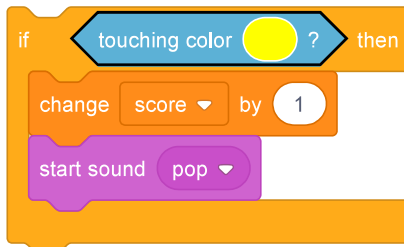

This is how you need to change the code for the blue sprite:



If you play the game now, you can see that the dots sometimes get created on top of each other.

Change the code for the 'yellow' dot sprite so that it waits four seconds after the flag is clicked before appearing.



```
when green flag clicked
hide
wait 4 seconds
```



Then change the code for the 'blue' dot sprite so that it waits 6 seconds after the flag is clicked before appearing.


Step 5 Increase the difficulty

Now you're going to make the game more difficult the longer the player plays it. You will do this by making the dots appear faster and faster over time.

Create a new **variable** called 'delay'.




Go to the Stage's Scripts area and create a new script that sets the **delay** variable to 8 and then slowly reduces the value of **delay** while the game runs.

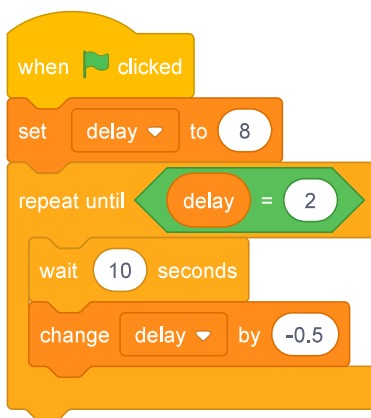

Notice that this code is very similar to the code you would use to create a countdown timer!

Next, use the **delay** variable in the code scripts of the 'red', 'yellow', and 'blue' sprites.

Remove the code block that makes the game wait a random number of seconds between making the dot sprite clones. Replace the block you've removed with your new **delay** variable:



Do this for all three dot sprites.

Test the game, and check whether the dots begin to appear more quickly as the game goes on.



- Does this work for all three coloured dots?
- Can you see that the value of the **delay** variable decreases?

Step 6 Challenge: faster dots

Can you improve your game by adding a `speed` variable and using this new variable to make the dot change their speed over time? The clones should start by moving one step at a time, and then steadily get faster and faster.

The code you need for this is very similar to the code in which you've used the `delay` variable.


Step 7 High score

You're going to save the game's high score, so that players can see how well they are doing.


Create a new variable called `high score`.



Select the Stage. Click on 'My blocks' and create a new custom block called `check high score`.

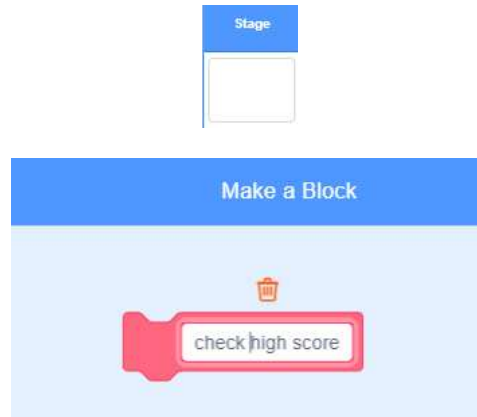

Add code to your custom block so that the block checks if the current value of `score` is larger than the value of the `high score` variable, and then stores the value of `score` as the new value of `high score`.

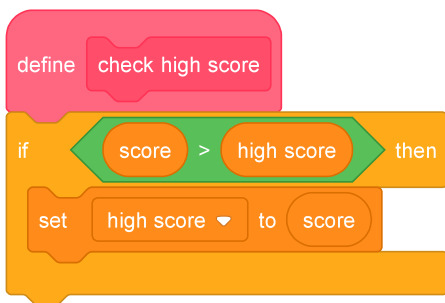

Add your new custom block to the Stage script before the end of the script.



```
when green flag clicked
  set lives to 3
  set score to 0
  wait until lives < 1
  check high score
  stop all
```

Play your game twice to check whether your score gets correctly saved as the **high score**.



Step 8 Challenge: improve your game

Can you think of ways to improve your game? For example, you could create special dots that:

- Double your score
- Slow down the dots
- Hide all the other dots on the screen

Can you add a menu with buttons to your game? You could add a screen with instructions or a separate screen for showing the high score.

Step 9 What next?

Try the **Clone wars** (https://projects.raspberrypi.org/en/projects/clone-wars?utm_source=pathway&utm_medium=whatnext&utm_campaign=projects) project to make a game in which you have to save the Earth from space monsters. In that project, you will be able to use what you have learned about cloning sprites and adding a score!

Score as many points as you can by shooting flying space-hippos. If you get hit by a hippo or by an orange dropped by the bats, you lose a life.



Published by Raspberry Pi Foundation (<https://www.raspberrypi.org>) under a Creative Commons license (<https://creativecommons.org/licenses/by-sa/4.0/>).

View project & license on GitHub (<https://github.com/RaspberryPiLearning/catch-the-dots>)